

NOVA Wood

Technical information



Other documents available for this product

NARBUTAS product care guide

Technical information for NOVA Wood meeting & coffee tables

Quality standard


LST EN 527-1:2011

LST EN 527-2:2017

LST EN 1730:2012

10 year Warranty

See Warranty statement

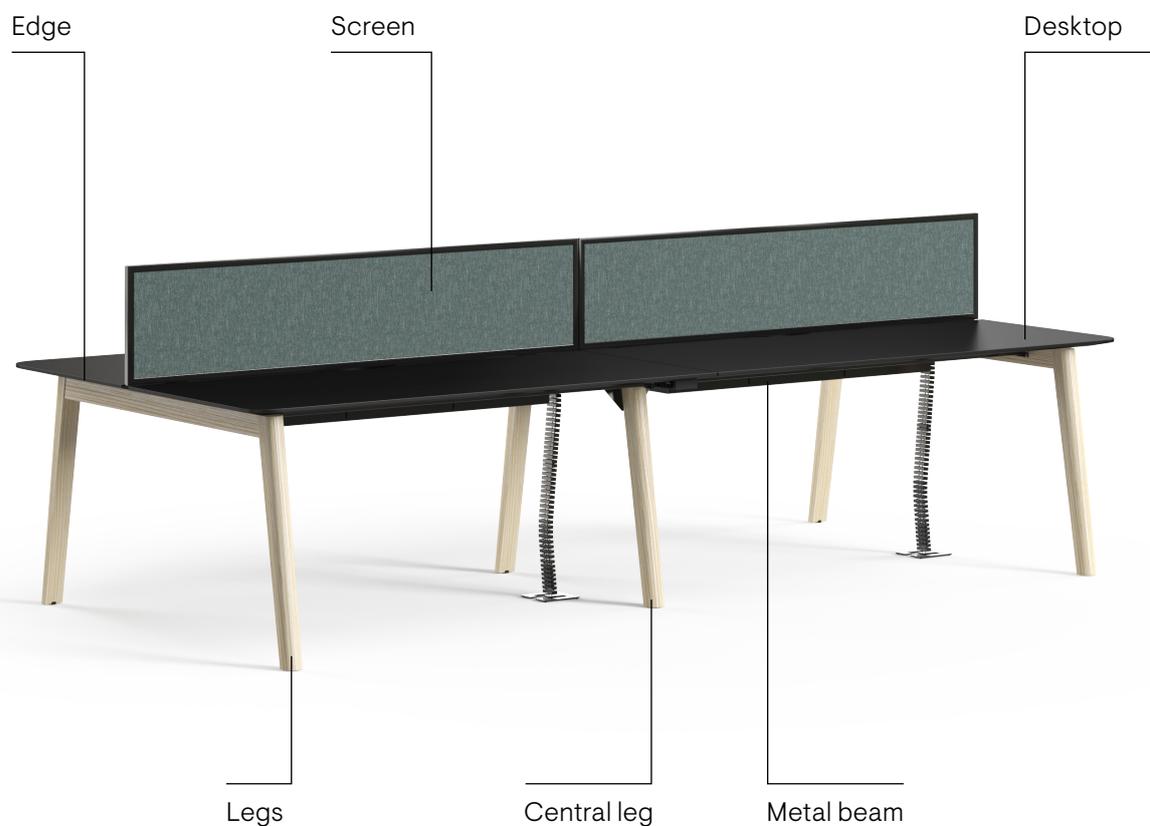

Technical information

Desktop

- 25 mm MFC (melamine) with 2 mm ABS edges;
- 26 mm MDF covered in HPL with sloping painted edges;
- Sloping painted edges: white or black colour;
- The corners of sloping desktop are rounded: R100 mm;
- 10 mm gap between the legs and the desktop;
- 40 mm gap between the desktops in back to back benches (depth of benches – 1440/1640).

Metal beam

- Metal tube - 40x20 mm;
- With welded metal plates for leg fixing;
- Powder coated metal.

Legs

- Lacquered and stained natural ash solid wood;
- Glued wood construction;
- With metal inserts for fixing;
- Plastic feet with height levelling (+10 mm) (6).

Central leg (solid wood leg fixed into metal tube)

- Lacquered and stained natural ash solid wood;
- Glued wood construction;
- With metal inserts for fixing;
- Plastic feet with height levelling (+10 mm);
- Metal tube: 120x40 mm, powder coated metal.

Edge type

- ABS edge (melamine) (1)
- Sloping edge (HPL) (2)


Desktop type

- Plain desktop (3)
- Desktop with a scallop for wire management (4)
- Desktop with a cut-out for grommet and wire management (5)




Range

Desks with melamine desktop

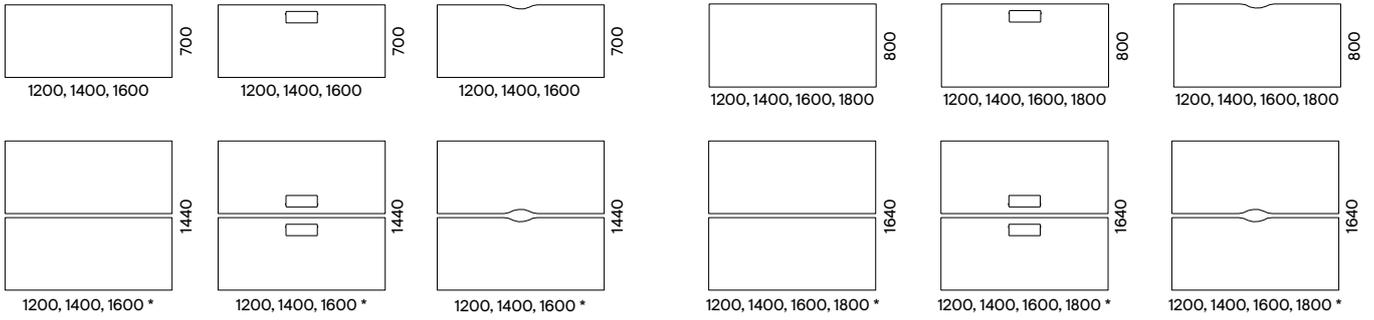

*To increase the number of workplaces, use supplementary units.

Desks with HPL desktop

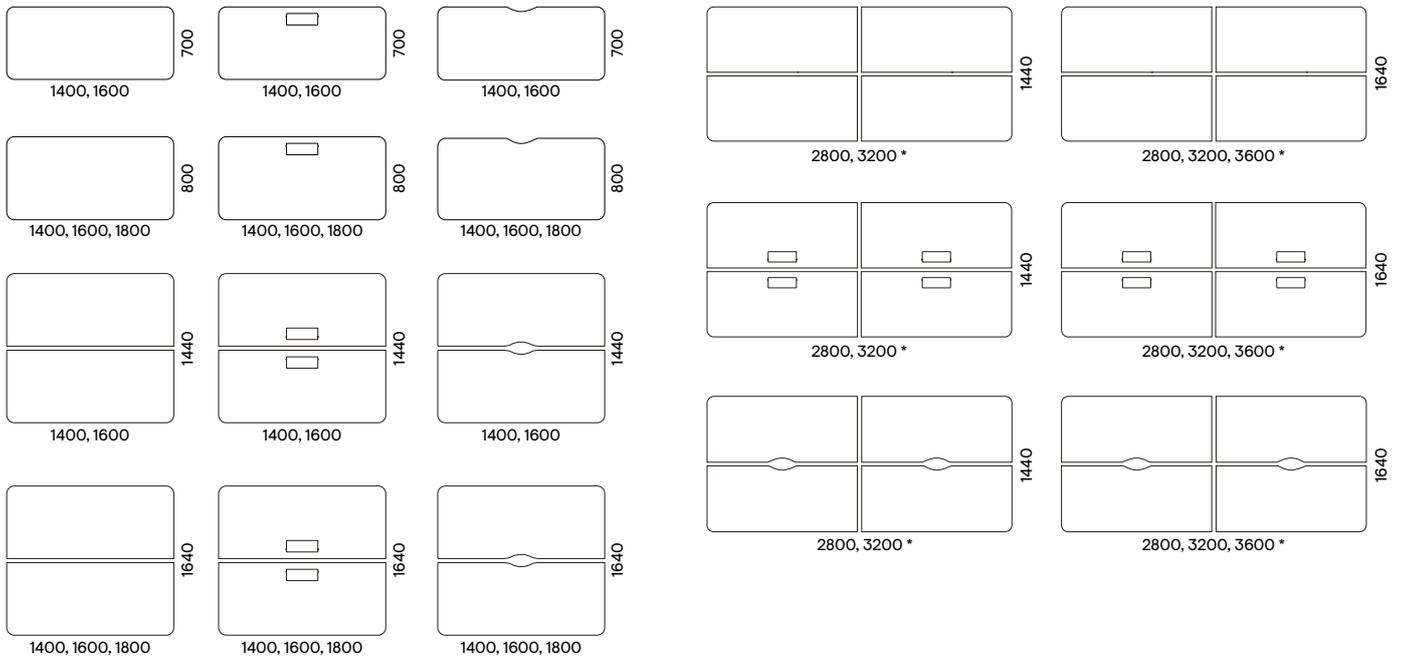

*To increase the number of workplaces, use supplementary units.

Additional information

- For desks with sloping edges the length of the cable tray must be 200 mm shorter than the length of the desktop.
- Two types of tabletops are available for the NOVA WOOD tables: HPL with sloping painted edges and Melamine with ABS 2mm straight edges.
- MDF tabletops covered in HPL with sloping raw (painted) edges are especially sensitive to contact with hard surfaces like metal or wood, thus require extra caution when used with hard seating furniture.
- If there is a need to increase the number of workplaces, a maximum of 4 supplementary units can be used in one combination. When connecting desk bench with more than 4 supplementary units, dimensional tolerances and variations may result in slight misalignment, causing desktops to extend beyond the metal frame. The longer the combination, the greater the chance of misalignment.